

# SMART Board 6000S (V3) Pro series

SBID-6065S-V3-P and SBID-6065S-V3-PW  
 SBID-6075S-V3-P and SBID-6075S-V3-PW  
 SBID-6086S-V3-P and SBID-6065S-V3-PW



Display	
<b>Screen sizes (diagonal)</b>	65", 75", 86"
<b>Backlight</b>	LED
<b>Aspect ratio</b>	16:9
<b>Maximum display resolution</b>	4K UHD (3840 × 2160)
<b>Refresh rate</b>	60 Hz
<b>Lifespan</b>	≥ 50,000 hours
<b>Brightness (maximum)</b>	≥ 350 cd/m <sup>2</sup>
<b>Response time</b>	65": ≤ 9 ms 75": ≤ 8 ms 86": ≤ 8 ms
<b>Viewing angle</b>	178°
<b>Glass</b>	Fully heat-tempered anti-glare glass that resists smudges and fingerprints
<b>Frame color</b>	White or black
<b>Convenience buttons</b>	Power, home, volume, screen shade, freeze frame
<b>Sensors</b>	Proximity, ambient light, infrared, room temperature and humidity <sup>1</sup>
<b>Audio</b>	2 integrated 20 W speakers Integrated linear four-microphone array

Interactive experience	
<b>Touch technology</b>	HyPr Touch™ with InGlass™
<b>Touch features</b>	Tool Explorer™ Simultaneous Tool Differentiation Object Awareness™ Pen ID™ Silktouch™ Pressure Sensitive Ink
<b>Typical response time</b>	9 ms
<b>Frame rate</b>	150 Hz
<b>Accuracy</b>	±1 mm
<b>Minimum object size</b>	2 mm
<b>Multitouch capabilities</b>	Up to 40 touch points (OS dependent)
<b>Tools included</b>	Pens (x2) Erasers (x2)
<b>Tool holders</b>	Intelligent, magnetic, frame-mounted
Software	
<b>SMART Meeting Pro® Room license</b>	Included
<b>SMART Meeting Pro Personal licenses (x10)</b>	Included
<b>SMART Ink® and SMART Product Drivers</b>	Included

[smarttech.com](http://smarttech.com)  
[smarttech.com/contact](http://smarttech.com/contact)

© 2022 SMART Technologies ULC. All rights reserved. SMART Board, SMART Meeting Pro, SMART Ink, HyPr Touch, Tool Explorer, SMART TeamWorks, Object Awareness, Pen ID, Silktouch, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: [www.smarttech.com/patents](http://www.smarttech.com/patents). Models and specifications may vary by region. Please contact your local representative for details. Contents are subject to change without notice. November 26, 2022.

<sup>1</sup>Temperature and humidity data is not available when iQ features are disabled.

PC computing	
OPS support	✓
OPS-C support	✓
PC module power supported OPS	60 W
Optional computing modules	SMART OPS PC with Windows 10 Pro SMART Chromebox

Inputs	Front	Back
OPS PC accessory slot (60 W devices)	-	1
HDMI® 2.1 with HDCP 1.4 and HDCP 2.3 support	1	2
VGA video	-	1
Stereo 3.5 mm	-	1
RS-232	-	1
RJ45	-	2
USB Type-C 4K @ 60Hz, Display Port 1.2, USB 2.0 (UFP) for touch and digital audio, USB 2.0 (DFP) for peripherals; 65 W power delivery	1	-
USB Type-C, 4K @ 60Hz, Display Port 1.2, USB 2.0 (UFP) for touch and digital audio, USB 3.2 Gen 1 (DFP) for peripherals; 65W power delivery	-	1
USB 2.0 Type-A	-	1
USB 3.0 Type-A	1	2
USB 3.0 Type-B	-	3
USB 2.0 Type-B	1	-

Outputs	Front	Back
HDMI 2.1	-	1
Stereo 3.5 mm	-	1
S/PDIF	-	1

Included cables and accessories	Qty
Country-specific power cable	1
USB cable	1
Pens (red and black)	2
Erasers	2
External dual-band 2.4 and 5 GHz antennae	3
Remote control	1
AAA batteries	2
WM-SBID-200 wall mount	1
Illustrated installation instructions	1
Important information document	1

Connectivity	
Wired	RJ45 (x2) 1000baseT

Storage and operating requirements	
Power requirements	100V to 240V AC, 50 Hz to 60 Hz
Operating temperature	41–95°F (5–35°C)
Storage temperature	-4–140°F (-20–60°C)
Humidity	5–80% relative humidity, non-condensing

Power consumption	
Typical	65": 105 W 75": 134 W 86": 161 W
Standby	0.4 W

Certification and compliance <sup>2</sup>	
Regulatory models	IDS665-3, IDS675-3, and IDS686-3
US / Canada	UL, FCC, ISED, TSCA, CONEG Packaging, Proposition 65
EU / EEA / EFTA / UK	CE, UKCA, LVD, CB, EMCD, RED, REACH, RoHS, Battery, WEEE, Packaging, POP, Ecodesign
Australia / New Zealand	RCM
Performance standards	ENERGY STAR®, HDMI

Purchasing information	
Order numbers	
SBID-6065S-V3-P	SMART Board® 6065S-V3 Pro interactive display
SBID-6075S-V3-P	SMART Board 6075S-V3 Pro interactive display
SBID-6086S-V3-P	SMART Board 6086S-V3 Pro interactive display
SBID-6065S-V3-PW	SMART Board 6065S-V3 Pro interactive display - White
SBID-6075S-V3-PW	SMART Board 6075S-V3 Pro interactive display - White
SBID-6086S-V3-PW	SMART Board 6086S-V3 Pro interactive display - White
TS-4PEN-MC	Tool Explorer multicolor 4-pen bundle (orange, purple, green, blue) with magnetic penwell

<sup>2</sup>Product availability may vary by region.

This product has received additional certifications not listed here.

<b>TW-SW-1</b>	SMART TeamWorks™ Room perpetual software includes 1 year maintenance
<b>TW-SW-3</b>	SMART TeamWorks Room perpetual software includes 3 year maintenance
<b>TW-SW-5</b>	SMART TeamWorks Room perpetual software includes 5 year maintenance

**Optional accessories**  
See [smarttech.com/accessories](http://smarttech.com/accessories)

**Warranty**

<b>SMART Assure warranty</b>	Includes advanced hardware replacement and access to onsite support. Terms and conditions vary by region. Contact your local reseller or distributor for information and visit <a href="http://smarttech.com/warranty">smarttech.com/warranty</a> .
------------------------------	---

**Cable requirements**

<b>HDMI</b>	Certified premium high speed HDMI (18 Gbps) Maximum length: 23' (7 m)
<b>USB 2.0</b>	USB 2.0 certified Hi-Speed (480 Mbps) support Maximum length: 16' (5 m)
<b>USB 3.0</b>	USB 3.0 certified SuperSpeed (5 Gbps) support Maximum length: 9' (3 m)
<b>USB Type-C</b>	USB 3.2 Gen 1 certified SuperSpeed (5 Gbps) support Maximum length: 6' (2 m)
<b>More information</b>	See <a href="http://smarttech.com/kb/171414">smarttech.com/kb/171414</a>


**Installation, dimensions, and weights**

**Notes**

- All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).
- Product ships upright.
- Leave space around the display to ensure adequate ventilation. See the *SMART Board 6000S and 6000S Pro installation and maintenance guide* ([smarttech.com/kb/171414](http://smarttech.com/kb/171414)) for the specific space requirements.

**SBID-6065S-V3-P/SBID-6065S-V3-PW**

**Dimensions**

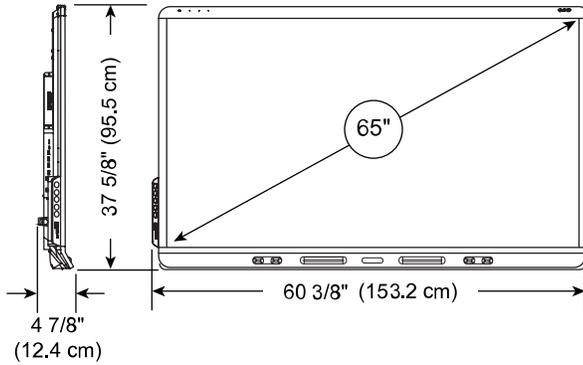

**Weight**

112 lb. (51 kg)


**VESA mount**

M8, 600 × 400 mm


**Handles**

2

**Shipping dimensions and weight (including pallet)**




67 1/8" × 46 1/2" × 10 3/8" (170.4 cm × 118.1 cm × 26.4 cm)  
159 lb. (72 kg)



64" × 46 7/8" × 8 5/8" (162.5 cm × 119 cm × 22 cm)  
150 lb. (68 kg)

**SBID-6075S-V3-P/SBID-6075S-V3-PW**

**Dimensions**

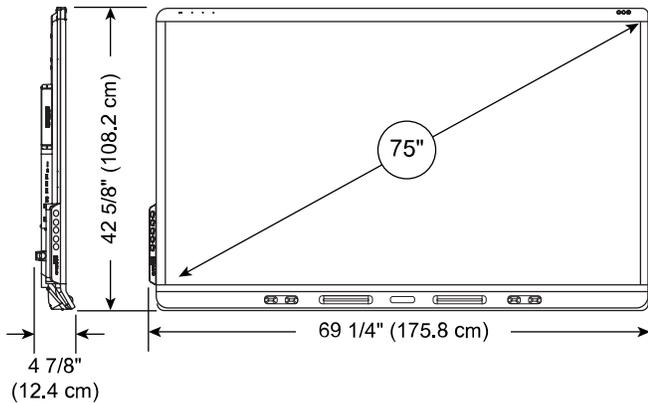

**Weight**

143 lb. (65 kg)


**VESA mount**

M8, 600 × 400 mm


**Handles**

2

**Shipping dimensions and weight (including pallet)**



76" × 51 1/2" × 10 3/8" (193.1 cm × 130.8 cm × 26.4 cm)  
194 lb. (88 kg)



72 7/8" × 52" × 8 5/8" (185 cm × 132 cm × 22 cm)  
185 lb. (84 kg)


## Installation, dimensions, and weights (continued)

### Notes

- All dimensions  $\pm 1/8"$  (0.3 cm). All weights  $\pm 2$  lb. (0.9 kg).
- Product ships upright.
- Leave space around the display to ensure adequate ventilation. See the *SMART Board 6000S and 6000S Pro installation and maintenance guide* ([smarttech.com/kb/171414](http://smarttech.com/kb/171414)) for the specific space requirements.

## SBID-6086S-V3-P/SBID-6086S-V3-PW

### Dimensions

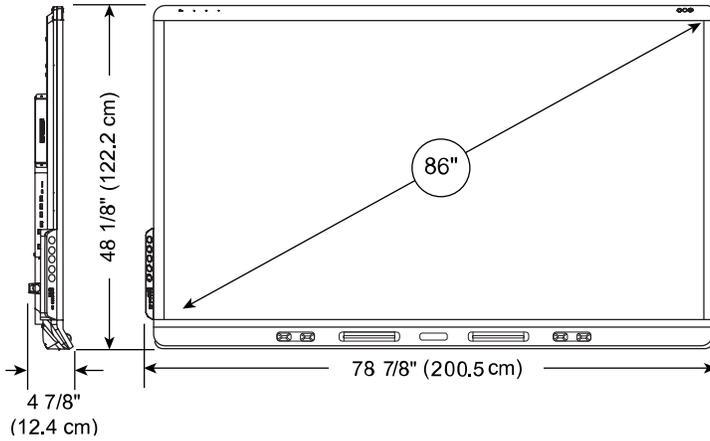

### Weight

185 lb. (84 kg)


### VESA mount

M8, 600 x 400 mm

### Handles

2

### Shipping dimensions and weight (including pallet)



86" x 57" x 10 3/8" (218.6 cm x 144.7 cm x 26.4 cm)  
243 lb. (110 kg)