

SMART Board® MX (V3) Pro series with iQ

SBID-MX255-V3N-PW
 SBID-MX265-V3N-PW
 SBID-MX275-V3N-PW
 SBID-MX286-V3N-PW

Also available in V3 models



| Display | |
|-----------------------------------|--|
| Screen sizes (diagonal) | 55", 65", 75", 86" |
| Backlight | LED |
| Aspect ratio | 16:9 |
| Maximum display resolution | 4K UHD (3840 × 2160) |
| Refresh rate | 60 Hz |
| Lifespan | ≥ 50,000 hours |
| Brightness (maximum) | 55": ≥ 300 cd/m ² 65", 75", 86": ≥ 400 cd/m ² |
| Response time | ≤ 8 ms |
| Viewing angle | 178° |
| Glass¹ | Fully heat-tempered, anti-glare, bonded glass |
| Frame color | White |
| Convenience buttons | Power, home, volume, input select, screen shade, freeze frame |
| Sensors | Ambient light, infrared |
| Audio | 2 integrated 15 W speakers |

| Interactive experience | |
|--------------------------------|---|
| Touch technology | HyPr Touch™ with Advanced IR |
| Touch features | Simultaneous Tool Differentiation™ Object Awareness™ Silktouch™ |
| Typical response time | ≤ 5 ms |
| Frame rate | ≥ 200 Hz |
| Accuracy | 1 mm |
| Minimum object size | 3 mm |
| Multitouch capabilities | 20 – Windows® and Mac 10 – Chrome OS™ |
| Tools included | Pens (x2) |
| Tool holders | Magnetic, frame-mounted |

| Software | |
|--|--|
| iQ built-in Android™ experience | Included |
| SMART Meeting Pro® Room license | Included |
| SMART Meeting Pro Personal licenses (x10) | Included |
| SMART Ink® and SMART Product Drivers | Included |
| SMART Remote Management | Subscription for length of the included warranty |

smarttech.com
smarttech.com/contact

© 2022 SMART Technologies ULC. All rights reserved. SMART Board, SMART Notebook, SMART Ink, HyPr Touch, Simultaneous Tool Differentiation, Object Awareness, Silktouch, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Models and specifications may vary by region. Please contact your local representative for details. Contents are subject to change without notice. November 25, 2022.

¹55" displays don't include zero-bonded glass.

| iQ built-in Android experience | |
|--|--|
| Operating system | Android version 11 |
| Memory | 6 GB DDR |
| Storage | 32 GB |
| Digital whiteboard | ✓ |
| Web browser | ✓ |
| Screen sharing | ✓ |
| Other features | Customizable home screen Live input preview File and app libraries Google Drive™ and OneDrive™ access |
| Object Awareness supported | ✓ |
| Ability to run third-party applications | ✓ |
| Cloud storage access | ✓ |
| Languages supported | Catalan, Chinese (simplified), Chinese (traditional), Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Slovak, Slovenian, Spanish, Swedish, Ukrainian, Vietnamese, Welsh (Addition of Basque, Valencian, and Galician scheduled for the last quarter of 2022.) |
| Updates | Automatic over-the-air (OTA) |
| PC computing | |
| OPS support | ✓ |
| OPS-C support | ✓ |
| PC module power supported OPS | 60 W |
| Optional computing modules | SMART OPS PC with Windows 10 Pro SMART Chromebox |

| Inputs | Front | Back |
|---|-------|------|
| OPS PC accessory slot (60 W devices) | – | 1 |
| HDMI® 2.0 with HDCP 1.4 and HDCP 2.2 support | 1 | 2 |
| VGA video | – | 1 |
| Stereo 3.5 mm | – | 1 |
| RS-232 room control (DB-9 connector) | – | 1 |
| RJ45 Ethernet (passthrough) | – | 2 |
| USB Type-C 4K @ 60Hz Display Port alternate mode, touch, and digital audio; 15 W power delivery | 1 | – |
| USB Type-C 4K @ 60Hz Display Port alternate mode, touch, and digital audio; 65 W power delivery | – | 1 |
| USB 2.0 Type-A | – | 1 |
| USB 3.0 Type-A | 2 | 1 |
| USB 3.0 Type-B | 1 | 3 |

| Outputs ² | Front | Back |
|--------------------------------------|-------|------|
| Stereo 3.5 mm (variable) | – | 1 |
| Audio S/PDIF (fixed) | – | 1 |
| RS-232 room control (DB-9 connector) | – | 1 |

| Included cables and accessories | Qty |
|---|-----|
| Country-specific power cable | 1 |
| 16' 5" (5 m) USB cable | 1 |
| Pens | 2 |
| External dual-band 2.4 and 5 GHz antennae | 3 |
| Remote control | 1 |
| AAA batteries | 2 |
| Wall mount bracket kit | 1 |
| Illustrated installation instructions | 1 |
| Important information document | 1 |

²V3 models also include an HDMI 2.1 (HDCP 2.3) Out connector.

Connectivity

| | |
|------------------|--|
| Wired | RJ45 (x2) 1000baseT |
| Wi-Fi | IEEE 802.11 a/b/g/n/ac with 2 x 2 MIMO (both 2.4 and 5 GHz bands) supporting WEP, WPA, WPA2 PSK, and 802.1X EAP authentication protocols |
| Bluetooth | 5.0 dual mode |

Storage and operating requirements

| | |
|------------------------------|---|
| Power requirements | 100V to 240V AC, 50 Hz to 60 Hz |
| Operating temperature | 41–95°F (5–35°C) |
| Storage temperature | –4–140°F (–20–60°C) |
| Humidity | 5–80% relative humidity, non-condensing |

Power consumption

| | |
|----------------|------------|
| Typical | 55": 90 W |
| | 65": 120 W |
| | 75": 150 W |
| | 86": 150 W |
| Standby | 0.4 W |

Certification and compliance³

| | |
|--------------------------------|---|
| US / Canada | UL, FCC, ISED, TSCA, CONEG Packaging, Proposition 65 |
| EU / EEA / EFTA / UK | CE, UKCA, LVD, CB, EMCD, RED, REACH, RoHS, Battery, WEEE, Packaging, POP, Ecodesign |
| Australia / New Zealand | RCM |
| Performance standards | ENERGY STAR®, HDMI |

Purchasing information

| | |
|---|--|
| Order number: SBID-MX255-V3-PW SBID-MX255-V3N-PW | SMART Board MX055-V3 interactive display with iQ |
| Order number: SBID-MX265-V3-PW SBID-MX265-V3N-PW | SMART Board MX065-V3 interactive display with iQ |
| Order number: SBID-MX275-V3-PW SBID-MX275-V3N-PW | SMART Board MX075-V3 interactive display with iQ |
| Order number: SBID-MX286-V3-PW SBID-MX286-V3N-PW | SMART Board MX086-V3 interactive display with iQ |
| Optional accessories | See smarttech.com/accessories |

Warranty

| | |
|------------------------------|---|
| SMART Assure warranty | Includes advanced hardware replacement and access to onsite support. Terms and conditions vary by region. Contact your local reseller or distributor for information and visit smarttech.com/warranty . |
|------------------------------|---|

Cable requirements

| | |
|-------------------------|--|
| HDMI | Certified premium high speed HDMI (18 Gbps) Maximum length: 23' (7 m) |
| USB 2.0 | USB 2.0 certified Hi-Speed (480 Mbps) support Maximum length: 16' (5 m) |
| USB 3.0 | USB 3.0 certified SuperSpeed (5 Gbps) support Maximum length: 9' (3 m) |
| USB Type-C | USB 3.2 Gen 1 certified SuperSpeed (5 Gbps) support Maximum length: 6' (2 m) |
| More information | See smarttech.com/kb/171555 |

³Product availability may vary by region.
This product has received additional certifications not listed here.


Installation, dimensions, and weights

Notes

- All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).
- Product ships upright.
- Leave space around the display to ensure adequate ventilation. See *SMART Board MX series interactive displays installation and maintenance guide* (smarttech.com/kb/171257) for the specific space requirements.

SBID-MX255-V3N-PW / SBID-MX255-V3-PW

Dimensions

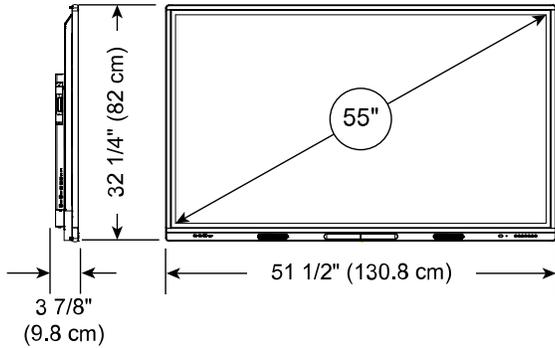

Weight

77 lb. (35 kg)

VESA mount

M8, 400 × 400 mm

Handles

0

Shipping dimensions and weight (including pallet)




56.9" × 40.7" × 8.1" (144.5 cm × 103.4 cm × 20.5 cm)
115 lb. (52 kg)



56.1" × 43.7" × 6.7" (142.5 cm × 111 cm × 17 cm)
116 lb. (53 kg)

SBID-MX265-V3N-PW / SBID-MX265-V3-PW

Dimensions

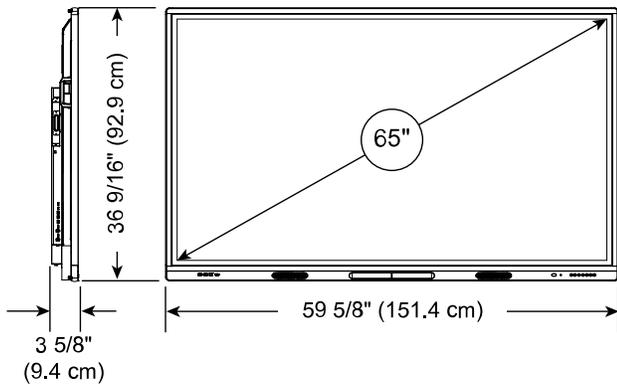

Weight

88 lb. (40 kg)

VESA mount

M8, 600 × 400 mm

Handles

2

Shipping dimensions and weight (including pallet)



65.2" × 45.6" × 8.1" (165.5 cm × 116 cm × 20.5 cm)
132 lb. (60 kg)



63.8" × 45.9" × 6.3" (162 cm × 116.6 cm × 16 cm)
134 lb. (61 kg)


Installation, dimensions, and weights (continued)

Notes

- All dimensions $\pm 1/8"$ (0.3 cm). All weights ± 2 lb. (0.9 kg).
- Product ships upright.

SBID-MX275-V3N-PW / SBID-MX275-V3-PW

Dimensions

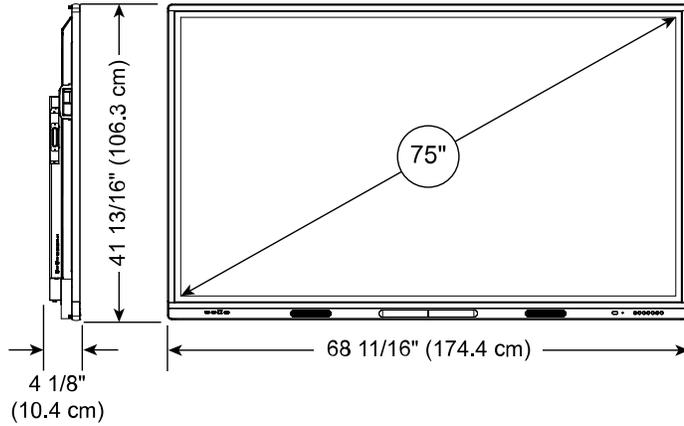

Weight

116 lb. (52 kg)

VESA mount

M8, 600 x 400 mm

Handles

2

Shipping dimensions and weight (including pallet)




$74.2" \times 50.2" \times 8.1"$ (188.5 cm x 127.4 cm x 20.5 cm)
166 lb. (75 kg)



$74.2" \times 50.6" \times 6.7"$ (188.5 cm x 128.5 cm x 17 cm)
169 lb. (77 kg)

SBID-MX286-V3-PW

Dimensions

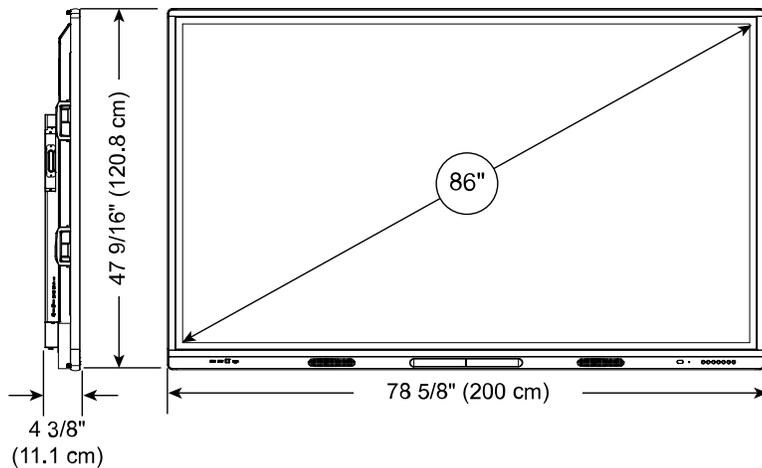

Weight

158 lb. (72 kg)


VESA mount

M8, 700 x 400 mm

Handles

4

Shipping dimensions and weight (including pallet)



$86" \times 47.6" \times 8"$ (218.5 cm x 142.4 cm x 20.5 cm)
219 lb. (99 kg)



$85.2" \times 56.9" \times 7.1"$ (216.5 cm x 144.5 cm x 18 cm)
222 lb. (101 kg)